




markilux syncra 2 flex / syncra 2 uno flex


Stylish solar shading and weather protection for large areas
Sleek, slender and attractive

markilux syncra 2 flex



with two folding-arm awnings




markilux 990



markilux 6000

markilux 1650 / 1600 /
1600 stretch


markilux 5010




markilux 1710

markilux syncra 2 uno flex



with one folding-arm awning




markilux 990



markilux 6000

markilux 1650 / 1600 /
1600 stretch

markilux 5010



markilux 1710

Design Features

sturdy awning stand system made of steel, purist in style

the appearance of the markilux syncra 2 harmonises perfectly with the design of the various awning models

protection from the sun and the rain in exposed areas (water drainage is guaranteed by the 15° pitch, at which the folding-arm awnings are permanently set)

instead of weighing down the stabilisation boxes with ballast, they could also be filled with soil and used as planters (open standard version)

optionally the stabilisation boxes can be fitted with wooden tops or aluminium covers

Technical Specification

free-standing awning frame system with round aluminium support posts and new cross member for the installation of folding-arm awnings (in the case of the syncra 2 – flex two folding-arm awnings, in the case of the syncra 2 uno flex – one folding-arm awning)

easily erected, weigh the stabilisation boxes down on site with sand, gravel, pebbles or soil

independent use of the individual awnings

can be placed wherever you like, no foundations required

especially well suited to properties, to which it is impossible (inadequate substrate) to fit an awning

can be positioned on the patio or in your favourite spot out in the open

Optional Accessories

polyester powder coating in non-standard colours is available to individual order (prices on request, longer lead time)



folding-arm awnings are optionally available with hard-wired or radio-controlled motor with markilux remote control

for model specifications as well as configuration options, colours and dimensions, please consult the relevant sections of the sales manual for each individual awning type

please ask us about awning dimensions which have been excluded from the dimension matrix

markilux syncra 2 flex**with two folding-arm awnings**


coverboard system – illustrated by way of the markilux 5010

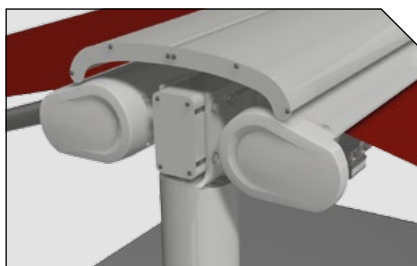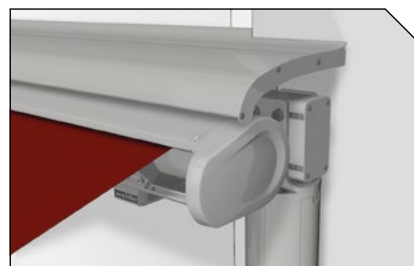**markilux syncra 2 uno flex****with one folding-arm awning**

internal cavity for convenient storage and protection of any cabling



fill each of the stabilisation boxes on site with at least 625 kg of sand, gravel, pebbles or soil.

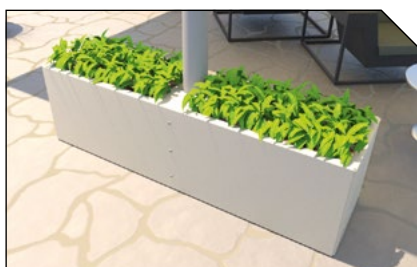

the new cross member ensures easy and flexible fixture of any markilux folding-arm awning

illustrated by way of example with the face fixture bracket of the markilux 6000


stabilisation box options shown by way of example with the markilux syncra 2 uno flex: open (standard, illustration on the left), with wooden top (optional, illustration in the centre) or with an aluminium cover (optional, illustration on the right),




For configuration options, colours and dimensions please consult the relevant sections of the sales manual for each individual awning type or the section referring to the pergola 110 / 210.

Installation dimensions


syncra 2 flex with two folding-arm awnings

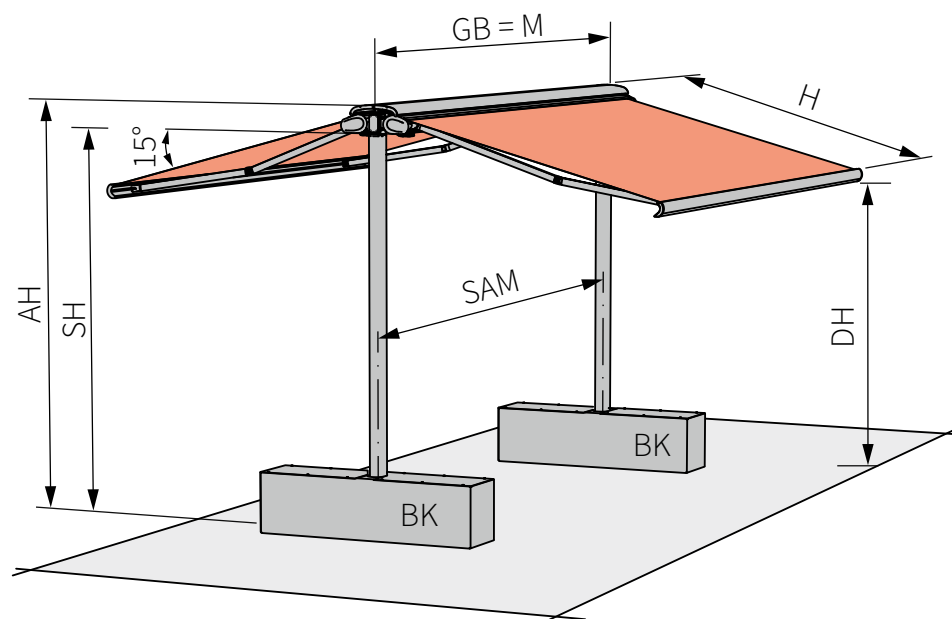

Fill each of the stabilisation boxes on site
with at least **625 kg of sand, gravel, pebbles or soil**

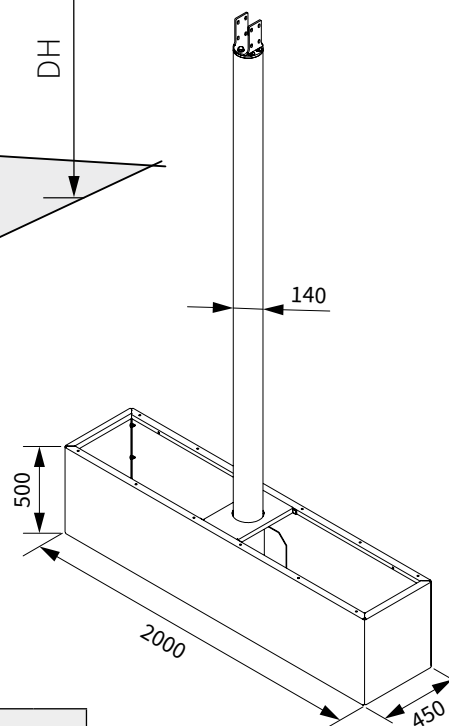

	AH	SAM	SAM*	GB	DH				
markilux 6000	3400	M – 140	M – 125	M	2930	2790	2660	2520	2390
markilux 5010	3420				2920	2780	2650	2510	2380
markilux 990		M – 440	M – 425		–	–			
markilux 1710 / 1710 stretch	3480	M – 140	M – 125		2970	2830	2700	2560	–
markilux 1600 / 1600 stretch / 1650					2430				
					2000	2500	3000	3500	4000
H									

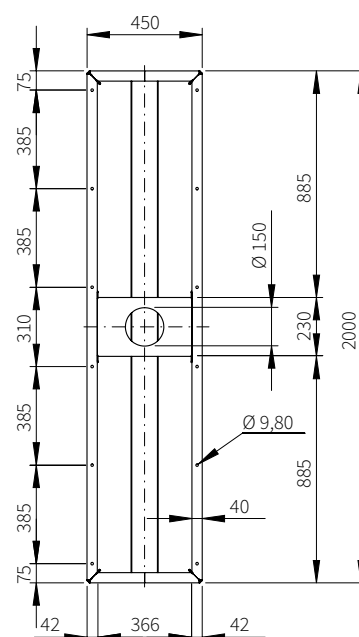


BK = stabilisation box
TW = overall width of the unit (depends on the awning model)
H = projection (depends on the awning model)
UD = unit height (depends on the awning model)
DH = headroom (depends on the awning model, dimensions rounded)
SAM = post separation, centre to centre (depends on the awning model)
M = awning width
SH = post height = 3200 mm
* = Information on angular posts


dimensions in mm

Installation dimensions


syncra flex 2 with one folding-arm awning

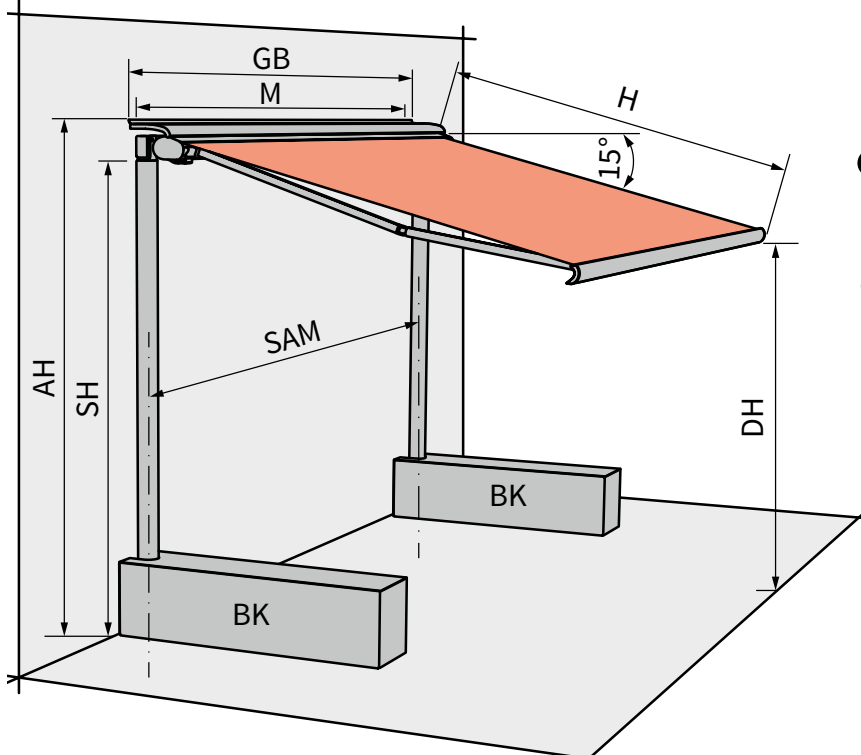

Fill each of the stabilisation boxes on site
with at least **625 kg of sand, gravel, pebbles or soil**

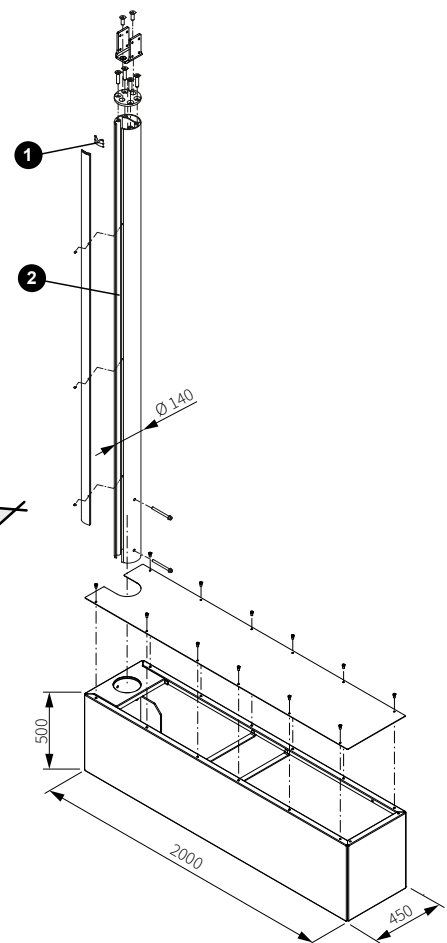

	AH	SAM	SAM*	GB	DH				
markilux 6000	3400	M – 140	M – 125	M	2930	2790	2660	2520	2390
markilux 5010	3420				M – 440	M – 425	2920	2780	2650
markilux 990								–	–
markilux 1710 / 1710 stretch	3480	M – 140	M – 125		2970	2830	2700	2560	–
markilux 1600 / 1600 stretch / 1650								2430	
					2000	2500	3000	3500	4000
					H				

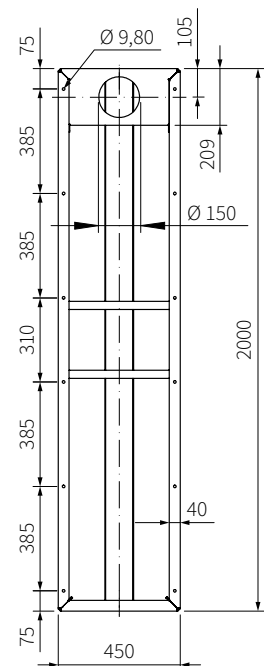

- BK = stabilisation box
 TW = overall width of the unit (depends on the awning model)
 H = projection (depends on the awning model)
 UD = unit height (depends on the awning model)
 DH = headroom (depends on the awning model, dimensions rounded)
 SAM = post separation, centre to centre (depends on the awning model)
 M = awning width
 SH = post height = 3200 mm
 * = Information on angular posts

dimensions in mm

